Aqua Whisper PRO

Model #	Production/Hr.	Production/24hrs.	AW PRO compact*	AW PRO modular*
450-1	19 Gal / 71 L	450 Gal / 1.703 L	157 lbs / 71 kg	157 lbs / 71 kg
700-1	29 Gal / 110 L	700 Gal / 2.650 L	160 lbs / 73 kg	160 lbs / 73 kg
900-1	38 Gal / 142 L	900 Gal / 3.407 L	162 lbs / 73 kg	162 lbs / 73 kg
900-2	38 Gal / 142 L	900 Gal / 3.407 L	169 lbs / 77 kg	169 lbs / 77 kg
1400-2	58 Gal / 221 L	1.400 Gal / 5.300 L	175 lbs / 79 kg	175 lbs / 79 kg
1800-2	58 Gal / 221 L	1.800 Gal / 6.814 L	180 lbs / 82 kg	180 lbs / 82 kg

*Weight based on single phase motor. For three phase motors substract 9 lbs.

Electrical	Phase	Pump Motor	Voltage VAC	Hz	Normal Operating Amps	Start Up Current
Plunger Pump	Single	High Pressure	110-11	50	110/220	110/220
		Booster	220-230	60	30/15	30/15
Plunger Pump	Three	High Pressure	220-230	50	220/380-440	220/380-440
		Booster	80-460	60	11/5.5	11/5.5

Circuit Breaker Size	Operating Voltage VAC	Phase	Recommended Operating Amps
Plunger Pump	110-115/220-230	Single	40 Ampere / 20 Ampere
	220/380/460	Three	15 Ampere / 10 Ampere / 10 Ampere

Aqua Whisper PRO - Dimensions

Compact - Front

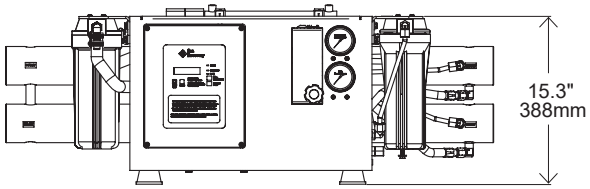

Modular - Control Panel

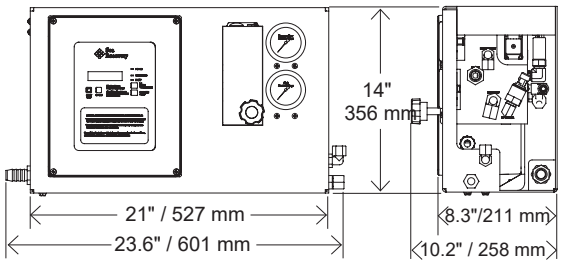

Control Panel - Front

Profile

Membrane Assembly

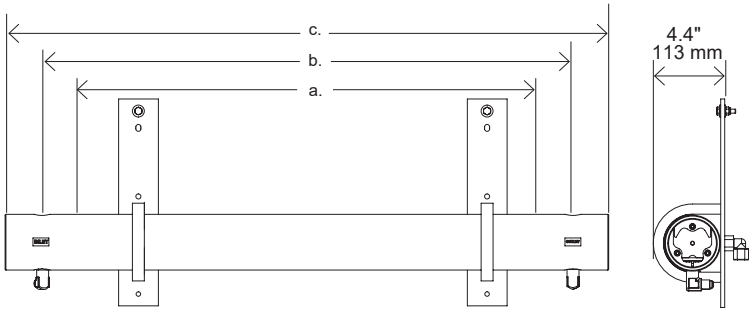

a. 27 15/16" (710mm): 450-1 & 900-2 | b. 37 15/16" (964mm): 700-1 & 1400-2
c. 46 15/16" (1192mm): 900-1 & 1800-2



Booster Pump



Sea Strainer

Compact - Top view

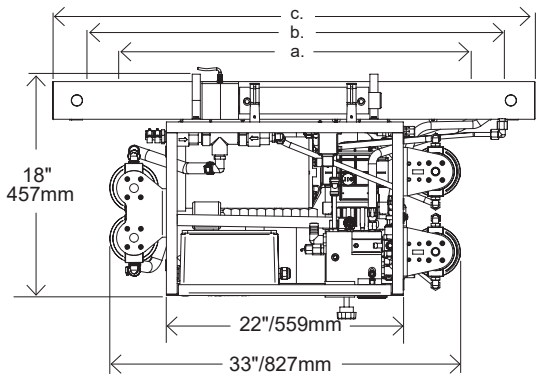

a. 27 15/16" (710mm): 450-1 & 900-2
b. 37 15/16" (964mm): 700-1 & 1400-2
c. 46 15/16" (1192mm): 900-1 & 1800-2



Standard Plunger Pump



Dual Pre-filter &
Dual Post Filter

Aqua Marine Control
www.aquacontrolmarine.com